


Features

- High dv/dt ability small size due to stacked construction


Configuration

Non-inductive, wound with metallized polyester film as the dielectric/
Electrode with copper-clad steel leads and encapsulated in a plastic case sealed with epoxy resin.

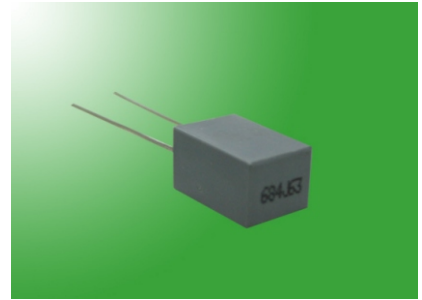

Specifications & Outline Drawing

Reference Standard	Gb7332 (IEC 60384-2)		
Climatic Category	55/125/56		
Rated Voltage	50/63V、100V、250、400V、500V、630V		
Capacitance Range	0.0010~1.5uF		
Capacitance Tolerance	± 5%(J), ±10%(K), ±20%(M)		
Voltage Proof	I: 1.6 U _R (5s) II: 1.4 U _R (5s)		
Dissipation Factor	Frequency	C _R ≤ 0.1uF	C _R ≤ 0.1uF
	1kHz	≤ 1.0%	≤ 1.0%
	10kHz	≤ 1.5%	≤ 1.5%
	100kHz	≤ 3.0%	
Insulation Resistance (20°C, 1min)	U _R ≤ 100V	≥ 1500MΩ C _R 0.33uF (20°C 10V, 1min) ≥ 5000s C _R > 0.33uF	
	U _R > 100V	≥ 30000MΩ C _R 0.33uF (20°C 10V, 1min)	
Maximum Pulse Rise Time DV/dt(V/s) <small>If the working voltage(U) is lower than therated voltage (U_R), the capacitor can be worked at ahigher dv/dt, In This maximum allowed dv/dt is batinby multiplying the Right value with U_R/U.</small>	U _R (V)	Dv/dt(V/uS)	
	50/63	250	
	100	300	
	250	400	
	400	600	
	500	700	
	630	800	

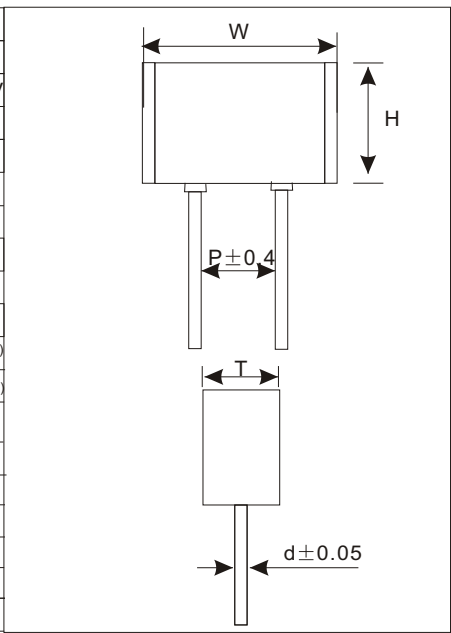

Dimensions

PART I (P=5.0mm)

Capacitance UF	50/63VDC			100VDC			250VDC			400VDC			500VDC			630VDC		
	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax
0.0010	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.0012	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.0015	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5
0.0018	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0022	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0027	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0033	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	7.5	3.5
0.0039	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	7.5	3.5
0.0047	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	9.5	4.5
0.0056	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	7.5	3.5	7.2	9.5	4.5
0.0068	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	9.5	4.5	7.2	9.5	4.5
0.0082	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	9.5	4.5	7.2	9.5	4.5
0.010	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	9.5	4.5	7.2	10.0	5.0
0.012	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	7.2	9.5	4.5	7.2	11.0	6.0
0.015	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	7.2	10.0	5.0	7.2	11.0	6.0
0.018	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	7.2	11.0	6.0			



TMCF10 Metallized Polyester Film Capacitor Stacked Box Type

Capacitance UF	50/63VDC			100VDC			250VDC			400VDC			500VDC			630VDC		
	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax
0.022	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0	7.2	11.0	6.0			
0.027	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0	7.2	11.0	6.0			
0.033	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0						
0.047	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0						
0.056	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	7.2	11.0	6.0						
0.068	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5									
0.082	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5									
0.10	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0									
0.12	7.2	6.5	2.5	7.2	9.5	4.5	7.2	10.0	5.0									
0.15	7.2	7.5	3.5	7.2	9.5	4.5	7.2	11.0	6.0									
0.18	7.2	7.5	3.5	7.2	9.5	4.5	7.2	11.0	6.0									
0.22	7.2	7.5	3.5	7.2	10.0	5.0												
0.27	7.2	9.5	4.5	7.2	10.0	5.0												
0.33	7.2	9.5	4.5	7.2	11.0	6.0												
0.39	7.2	9.5	4.5	7.2	11.0	6.0												
0.47	7.2	10.0	5.0	7.2	11.0	6.0												
0.56	7.2	10.0	5.0	7.2	11.0	6.0												
0.68	7.2	11.0	6.0															
0.82	7.2	11.0	6.0															
1.0	7.2	11.0	6.0															

PART II (P=5.0mm)

Capacitance UF	50/63VDC			100VDC			Capacitance UF	400VDC			500VDC		
	Wmax	Hmax	Tmax	Wmax	Hmax	Tmax		Wmax	Hmax	Tmax	Wmax	Hmax	Tmax
0.10				7.2	6.5	2.5	0.39	7.2	7.5	3.5	7.2	9.5	4.5
0.12				7.2	6.5	2.5	0.47	7.2	7.5	3.5	7.2	10.0	5.0
0.15	7.2	6.5	2.5	7.2	7.5	3.5	0.56	7.2	9.5	4.5	7.2	10.0	5.0
0.18	7.2	6.5	2.5	7.2	7.5	3.5	0.68	7.2	9.5	4.5	7.2	11.0	6.0
0.22	7.2	6.5	2.5	7.2	7.5	3.5	0.82	7.2	9.5	4.5	7.2	11.0	6.0
0.27	7.2	6.5	2.5	7.2	9.5	4.5	1.0	7.2	10.0	5.0	7.2	11.0	6.0
0.33	7.2	7.5	3.5	7.2	9.5	4.5	1.5	7.2	11.0	6.0			